



KORI Piston Rings S.à.r.l


Kompressionsringe / Compression Rings / Segments de Compression

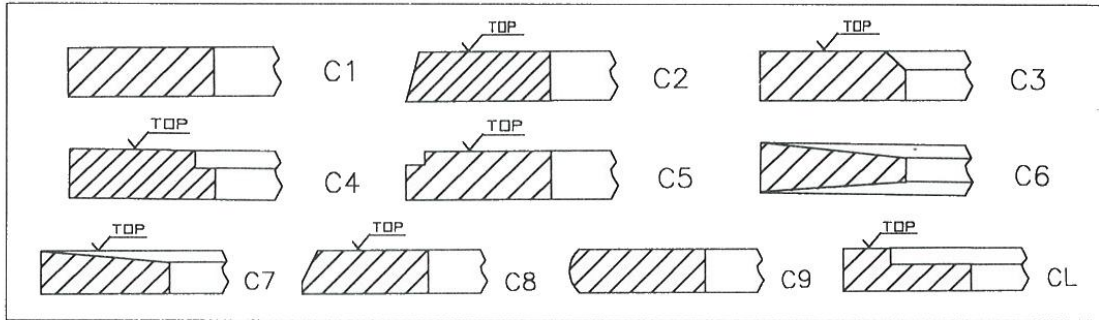

Nasenringe / Napier Rings / Segments Racleurs




Ölabstreifringe / Oil Rings / Refouleurs

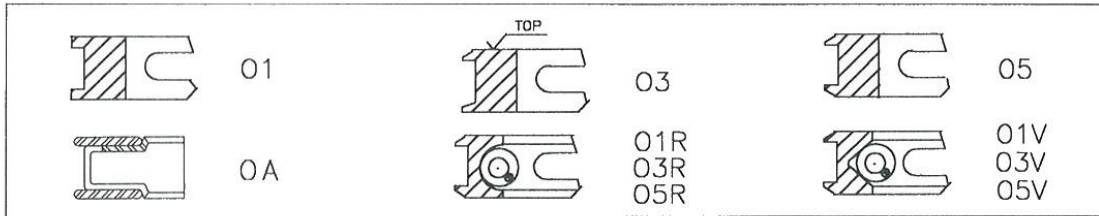

Kanten / Edges / Arêtes



Stoss / Joint

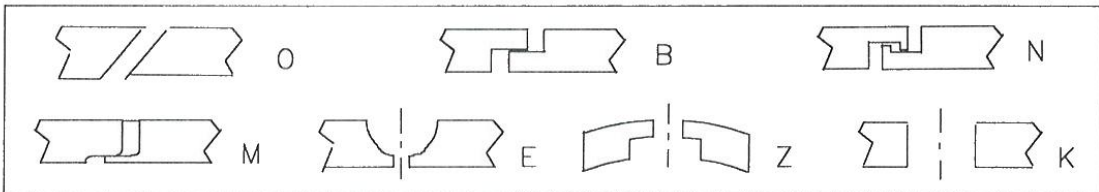

Beschichtungen / Coatings / Revêtements

D — SEGMENTO CROMADO CHROME PLATED RING SEGMENT CHROME	DF — SEGMENTO CROMADO FLASH FLASH CHROME PLATED RING SEGMENT CHROME FLASH	P — SEGMENTO FOSFATADO PHOSPHATE COATED RING SEGMENT PHOSPHATE
T — SEGMENTO ESTANHADO TIN COATED RING SEGMENT ETAME	C — SEGMENTO COBREADO COPPER COATED RING SEGMENT CUIVRE	

MATERIAL

MECHANICAL PROPERTIES	STANDART GREY IRON	DUCTIL IRON
HARDNESS	210 - 290 HB	240 - 290 HB
NODULUS OF ELASTICITY	85.000 - 115.000 N/mm ²	min 160.000 N/mm ²